


MULTIPLES OF AMPERE SETTINGS (CONTINUOUS)

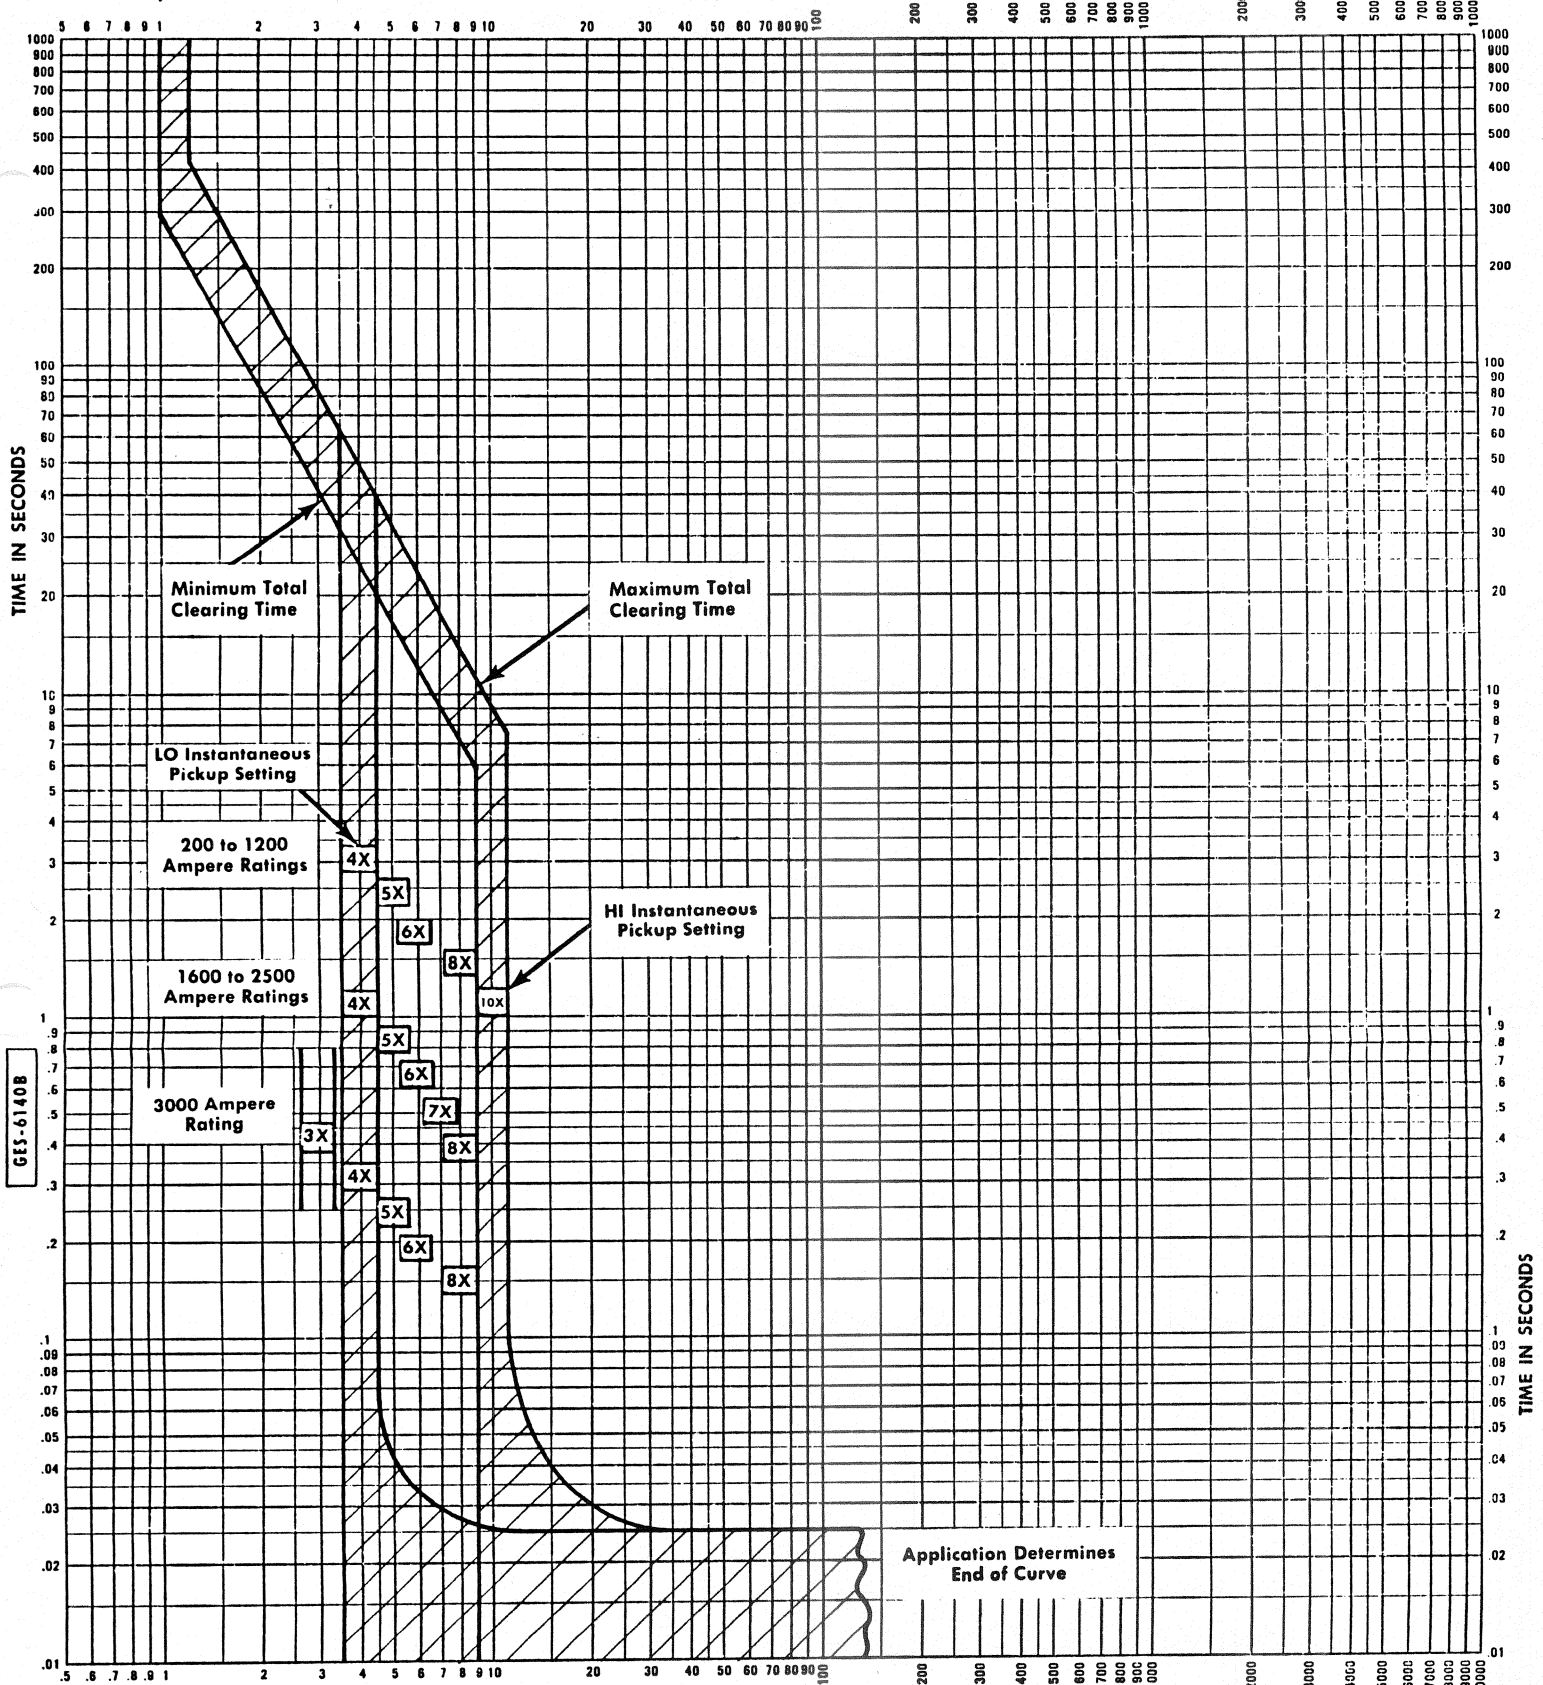

MULTIPLES OF AMPERE SETTING (CONTINUOUS)

<p>GENERAL ELECTRIC</p> <p>Sensor Rating (Amperes) 200, 400, 600, 800, 1200 1600, 2000, 2500, 3000 amperes</p> <p>Voltage Rating 600 volts ac</p> <p>Frequency Rating 50/60 Hertz</p>	<p>INSULATED-CASE CIRCUIT BREAKER</p> <p>POWER BREAK™</p> <p>With SelectTrip™</p> <p>Types TPR, THR, TPRR, THRR</p> <p>Long-time and Instantaneous Time-current Curves</p> <p><small>(Curves apply at 50/60 Hertz and from -20C to +55C breaker ambient)</small></p>	<p>GE-6140B</p> <p>Adjustments</p> <p>Long-time Delay Unit: Continuous current settings are 50, 60, 70, 80, 90 and 100% of sensor rating.</p> <p>Instantaneous Unit: Pick-up current settings are 4X, 5X, 6X, 8X and 10X multiples of Long-time unit settings thru 1200 amperes, 4X, 5X, 6X, 7X and 8X for 1600 to 2500 amperes and 3X, 4X, 5X, 6X and 8X for 3000 ampere ratings.</p>
--	---	--