


TEMP. 0 25 40 50 60 C

Shift index for long-time delay only.

MULTIPLES OF CURRENT RATING

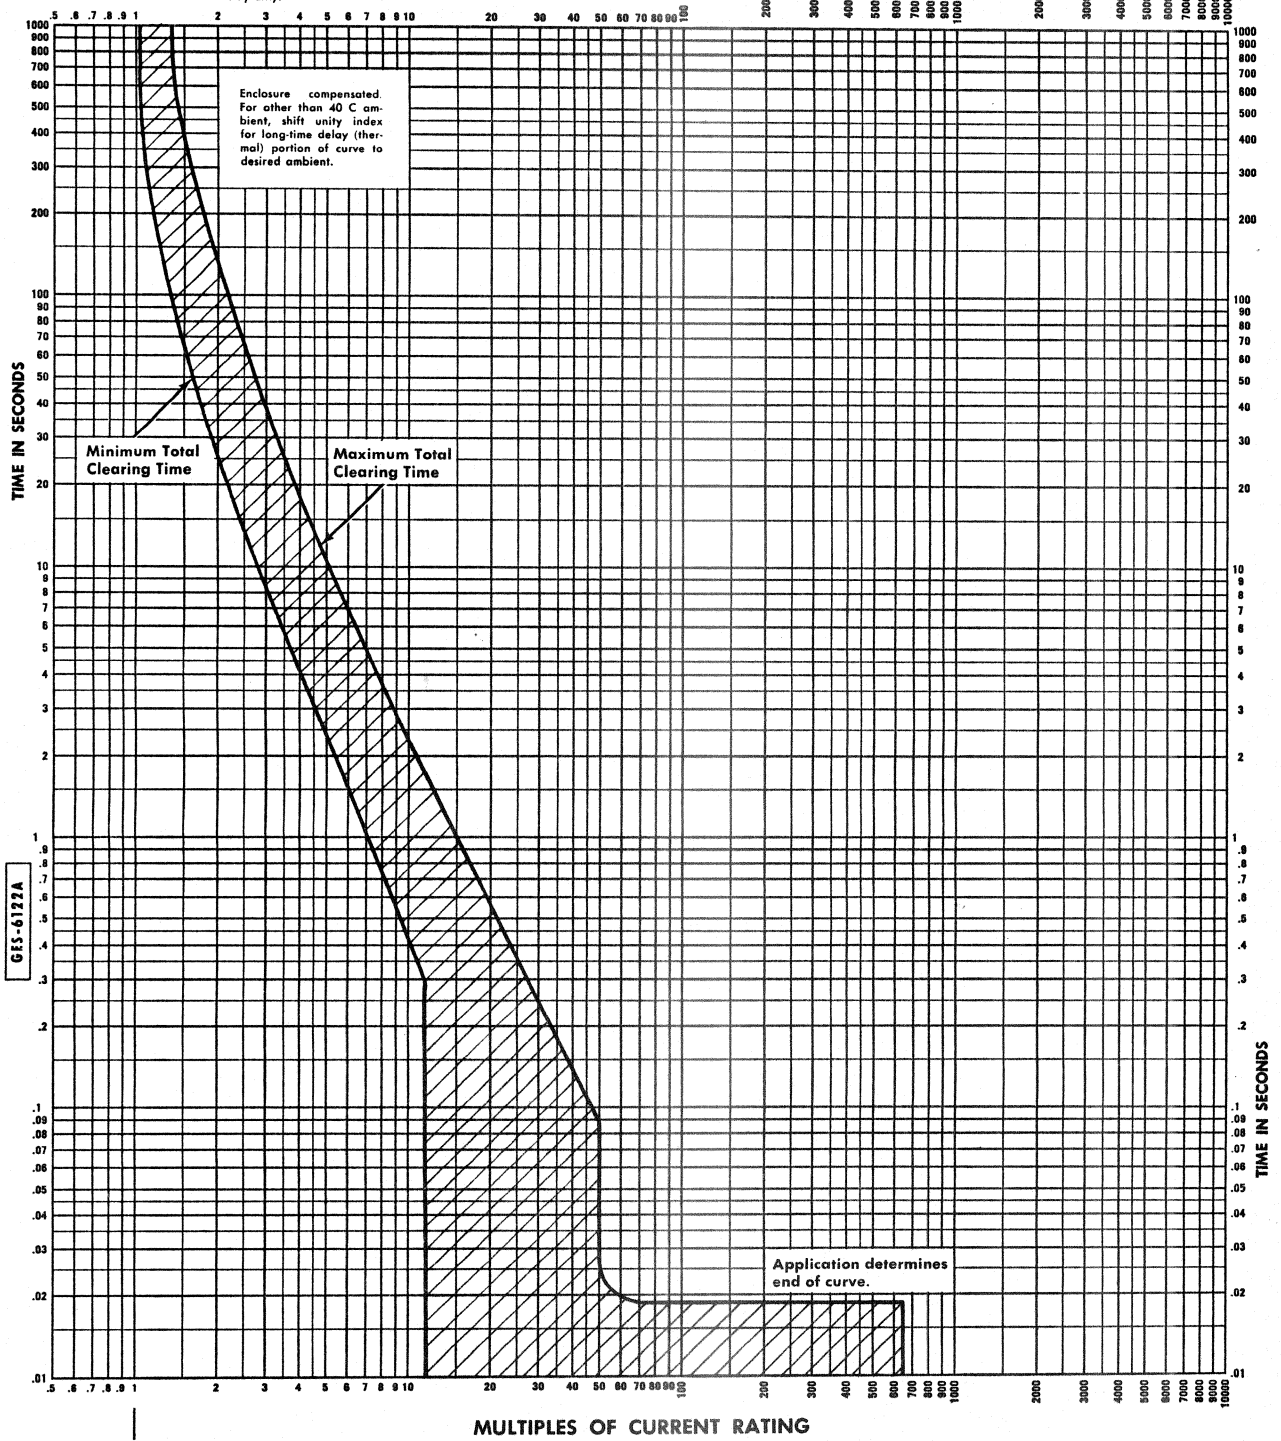

GE-6122A

GENERAL ELECTRIC

MOLDED-CASE CIRCUIT BREAKER

GE-6122A

Current Ratings
15, 20, 25, 30, 35, 40 and 45 amperes

E 100 LINE

Type TEB, 15-45 Amperes

Voltage Ratings
2- and 3-pole-240 volts a-c (250 volts d-c)

Enclosure Compensated
Long-time Delay and Instantaneous Time-current Curves

Frequency Rating
60 Hertz

(Curves show enclosure-compensated circuit breaker in open air, 40 C ambient, wired with conductors of corresponding rating, no prior load.)
For all other ambients, use shift index at top of sheet.

Adjustments

Long-time delay thermal trip: not adjustable.
Instantaneous magnetic trip: not adjustable.