


15 KV BUSHING, TYPE RJ
110 BIL, COVER MOUNTED
NEMA STANDARD

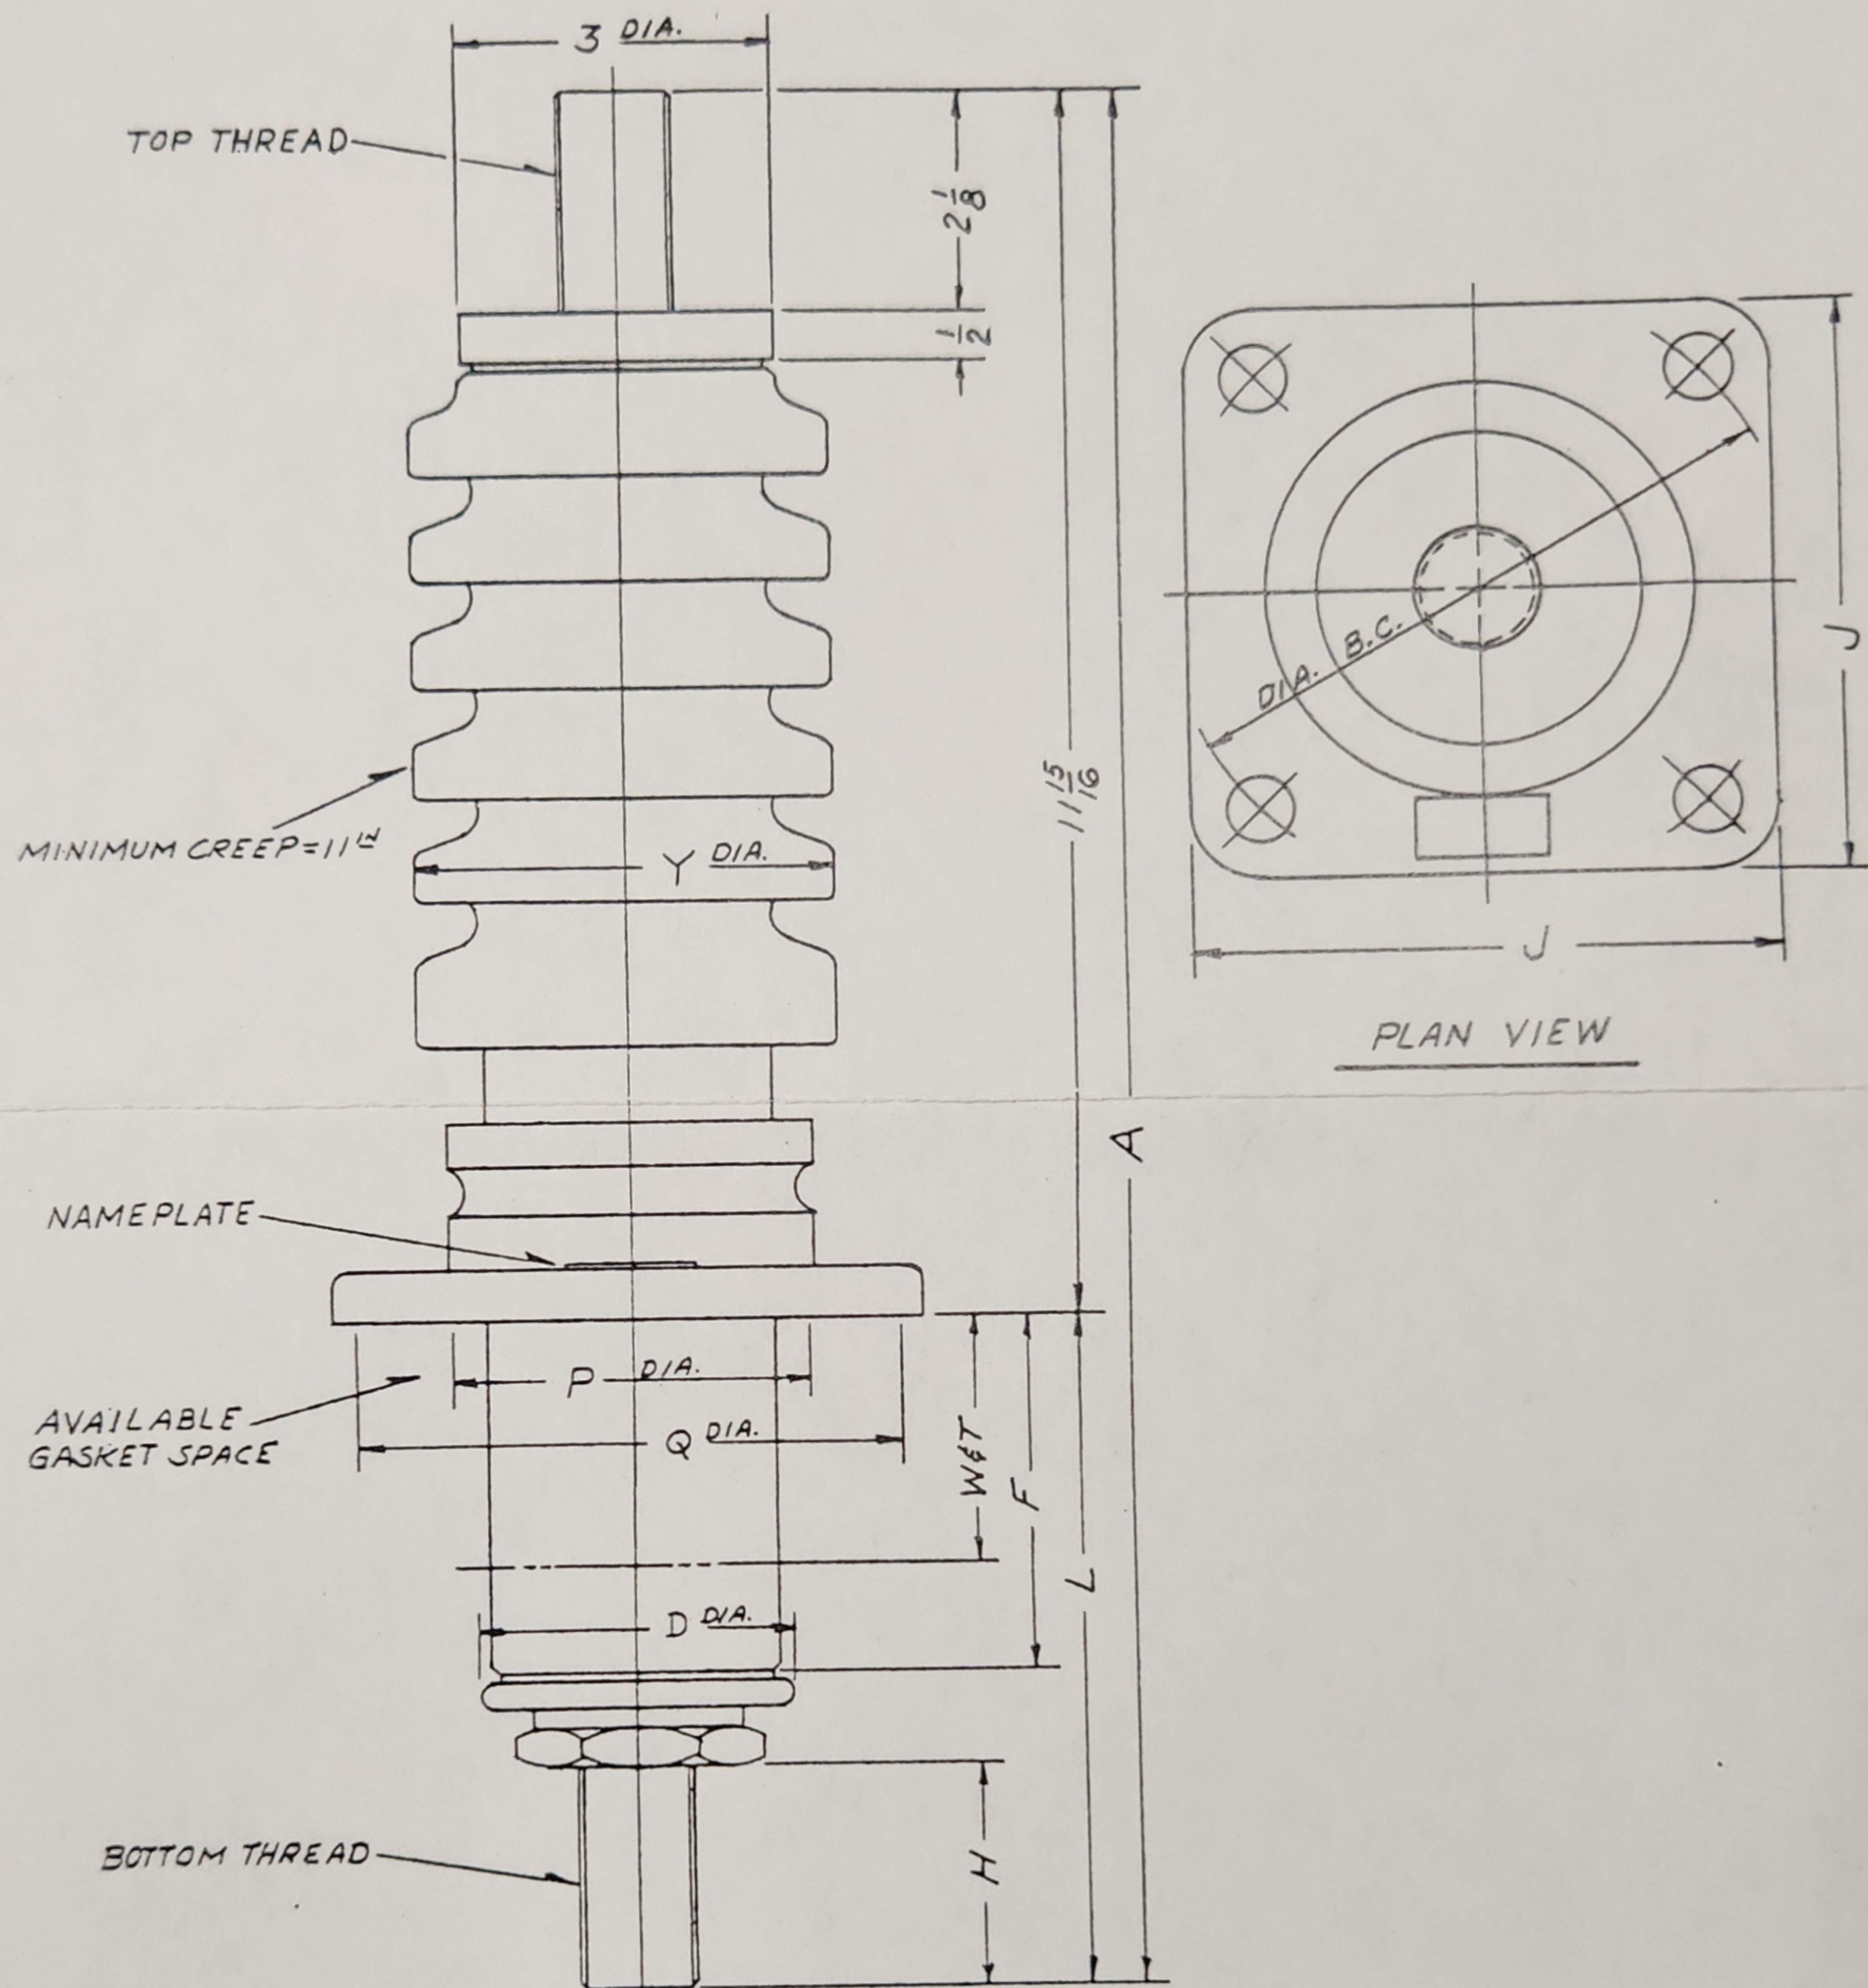

LINE	STYLE NO.	COLOR	AMPS.	L	W/T	D	TOP & BOT. THR'D	P	Q	DIA. B.C. NO. & SIZE HOLES	A	F	J	H	Y	NET WT. POUNDS
1	234C116 G01	CHOC	1200	16 1/2	10	3	1 1/8-12	3 3/8	5 1/8	6-4-5/8	28 7/16	13 1/2	5 5/8	2	4	22 1/2
2	234C116 G04	GRAY		23	16 1/2						34 15/16	20				27 1/2
3	234C116 G02	CHOC		27 1/2	21						39 7/16	24 1/2				30 1/2
4	234C116 G05	GRAY														
5	234C116 G03	CHOC														
6	234C116 G06	GRAY														
7	234C117 G01	CHOC	2000	17	10	3 3/4	1 1/2-12	4 1/4	6 1/4	7 1/4-4-5/8	28 15/16	13 1/2	6 1/2	2 1/2	4 5/8	35 1/4
8	234C117 G04	GRAY		23 1/2	16 1/2						35 7/16	20				44
9	234C117 G02	CHOC		28	21						39 13/16	24 1/2				50
10	234C117 G05	GRAY														
11	234C117 G03	CHOC														
12	234C117 G06	GRAY														

① W = DEPTH OF CURRENT TRANSFORMER POCKET
T = DISTANCE TO MINIMUM FLUID LEVEL